

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | | |
|--|--|----|---|
| (51) International Patent Classification ⁴ : A01M 29/02, H03K 7/06 | | A1 | (11) International Publication Number: WO 86/ 02526 (43) International Publication Date: 9 May 1986 (09.05.86) |
| (21) International Application Number: | PCT/AU85/00258 | | |
| (22) International Filing Date: | 28 October 1985 (28.10.85) | | |
| (31) Priority Application Number: | PG 7858 | | |
| (32) Priority Date: | 26 October 1984 (26.10.84) | | |
| (33) Priority Country: | AU | | |
| (71) Applicant (for all designated States except US): | HI-TEC CONTROL SYSTEMS PTY. LTD. [AU/AU]; 43 Holland Street, Goonellabah, NSW 2480 (AU). | | |
| (72) Inventor; and | | | |
| (75) Inventor/Applicant (for US only) : | FRY, Alan [AU/AU]; 43 Holland Street, Goonellabah, NSW 2480 (AU). | | |
| (74) Agent: | SIELY, James, Gordon; Arthur S. Cave & Co., Gold Fields House, 1 Alfred Street, Sydney, NSW 2000 (AU). | | |

Best Available Copy

(54) Title: ELECTRONIC FREQUENCY MODULATOR

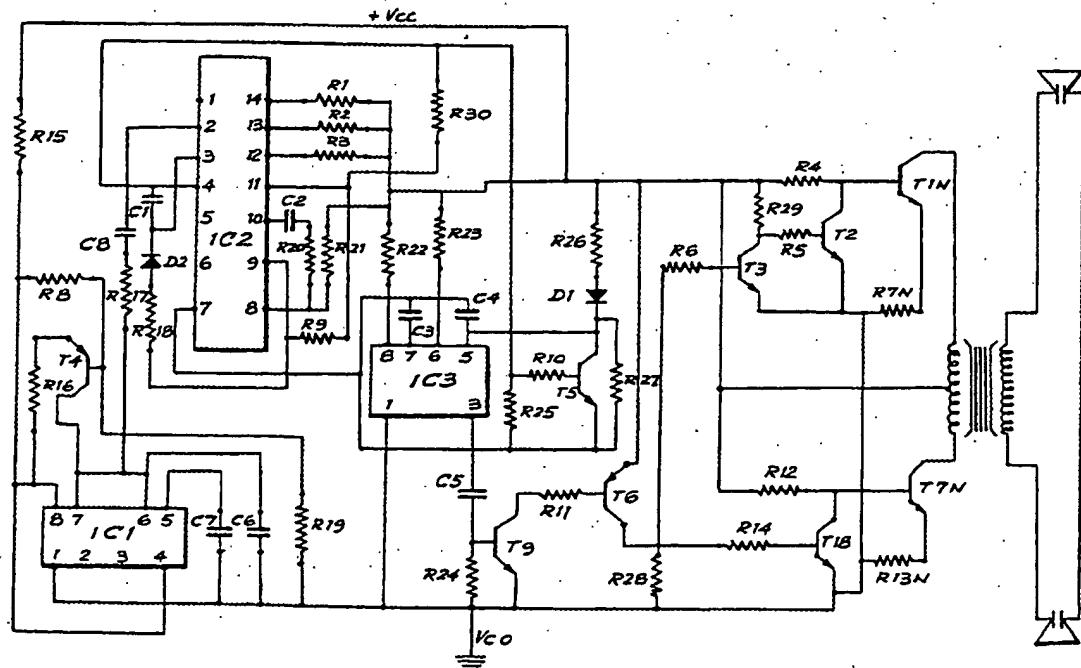

(57) Abstract

Electronic frequency modulator which combines a lower band frequency with an upper band frequency to produce a square wave output on transmission from a transducer. The present invention can be used as a method of protecting crops from crop pests.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT Austria
AU Australia
BB Barbados
BE Belgium
BG Bulgaria
BR Brazil
CF Central African Republic
CG Congo
CH Switzerland
CM Cameroon
DE Germany, Federal Republic of
DK Denmark
FI Finland
FR France

GA Gabon
GB United Kingdom
HU Hungary
IT Italy
JP Japan
KP Democratic People's Republic of Korea
KR Republic of Korea
LI Liechtenstein
LK Sri Lanka
LU Luxembourg
MC Monaco
MG Madagascar
ML Mali

MR Mauritania
MW Malawi
NL Netherlands
NO Norway
RO Romania
SD Sudan
SE Sweden
SN Senegal
SU Soviet Union
TD Chad
TG Togo
US United States of America

- 1 -

ELECTRONIC FREQUENCY MODULATOR

The present invention relates to an electronic frequency modulator of the type wherein a lower band frequency is transmitted on a carrier wave being an upper band frequency. The present invention has particular application in its use as an electronic scarecrow, however it will be apparent to those skilled in the art that the present invention is of wider application as a deterrent to animal and insect crop pests, and is not therefore to be limitively construed by the following detailed description of its use as an electronic scarecrow.

In Australia considerable damage is done to crops and in particular orchards by flying foxes (fruit bats) and birds which descend and devour or damage fruit prior to harvest.

In an average orchard of ten acres containing between three and four thousand fruit trees it is not uncommon for, from two to three million flying foxes, to descend on the orchard and completely devastate the fruit crop and even to break the secondary growth on the trees all within a time span of half an hour.

In order to prevent such destruction of crops, orchardists and growers presently use nets, electric wires and guns in an effort to at least save some of the crop.

These three presently used methods are only partially effective as both electric wires and guns are activated on a periodic cycle and the birds or bats soon learn when the deterrent is non-activated and netting of large areas of orchards or crops is both labour intensive and inefficient in coping with the extreme numbers of birds or bats that can descend on a crop or orchard.

The present invention seeks to substantially overcome or at least ameliorate to a great extent the above disadvantages.

In one broad aspect there is provided an electronic frequency modulator which combines a lower band frequency with an upper band frequency to produce a square wave

- 2 -

output on transmission from a transducer, preferably a peizo ceramic.

5 In a further aspect of the invention there is provided a method of protecting crops from crop pests using an electronic frequency modulator which combines a lower band frequency with an upper band frequency to produce a square wave output on transmission from a transducer, preferably a peizo ceramic.

10 The present invention generates acoustically pressurized air waves which affect the muscular and skeletal structure of the bird or bat in flight and the unpleasant sensation causes the bird or bat to divert its flight path to avoid the effect.

15 Whilst sonic and ultrasonic devices are known and have been tried in the past as a deterrent against birds and bats, they have proven ineffective because the bird or bat soon realises that it is only a noise and there is nothing physical preventing them from feeding.

20 Through lengthy trials it was discovered that only a specific modulated frequency corresponding with the bird or bat's wing beat would give an unpleasant effect causing the bird or bat to divert its flight path and avoid the effect. It was found that within certain species not every member of that species would be affected by the one modulated frequency.

25 The ultrasonic frequency effective in controlling crop pests was found to lie within the following ranges.

| | | |
|----|------------|-------------|
| | marsupials | 10 - 25 KHz |
| | birds | 15 - 35 KHz |
| 30 | insects | 40 - 80 KHz |

Models are presently available for the specific applications as set out below.

| 35 | <u>MODEL</u> | <u>CROP PEST</u> | <u>LOWER BAND</u> | <u>UPPER BAND</u> |
|----|--------------|-----------------------------|-------------------|-------------------|
| | | | <u>FREQUENCY</u> | <u>FREQUENCY</u> |
| | | | <u>INFRASONIC</u> | <u>ULTRASONIC</u> |
| | | | CPS | KHz |
| | 815 | Crows, galahs, cockatoos | 1-400 | 17-30 |

- 3 -

| <u>MODEL</u> | <u>CROP PEST</u> | <u>LOWER BAND</u> | <u>UPPER BAND</u> |
|--------------|------------------|--|-------------------|
| | | <u>FREQUENCY</u> | <u>FREQUENCY</u> |
| | | <u>INFRASONIC</u> | <u>ULTRASONIC</u> |
| | | CPS | KHZ |
| 5 | 825 | Starlings, leathernecks, parrots (certain varieties only) | 1-200 25-40 |
| 10 | 835 | Sheep, cattle, kangaroos, pigs | 1-100 20-25 |
| 15 | 845 | Flying foxes, cormorants, pelicans, dogs, egrets, night herons, ducks | 1-350 20-25 |
| 20 | 855 | Rabbits, mice, white tail rats, possums, wombats | 1-50 18-30 |

The present invention will now be described by reference to a preferred embodiment which is illustrated in the attached drawings in which

Fig. 1 is a schematic view of the preferred embodiment in use as an electronic scarecrow.

Fig. 2 is a circuit diagram of the electronic circuitry of the embodiment of Fig. 1.

The electronic scarecrow shown in Fig. 1 is used in a ten acre paddock and is designed to withstand extremes of weather and the normal handling of orchardists and farmers. The electronic scarecrow can be run either continuously or can be preset with a programmable timer to only operate when the crop pests are most prevalent. For larger operations several devices as shown in Fig. 1 can be spaced throughout the orchard or farm.

In Fig. 1 the commercial electronic scarecrow comprises a plurality of known transducer heads 1, mounted on a support column 2 by means of adjustable

- 4 -

mount 3. The support column 2 is stayed to the ground by conventional stays 4 supported on plate 5 on support column 2.

5 A power supply in the form of a battery 6 is connected to the power pack 7 containing the electronic timer switch, battery level indicator and circuitry as detailed in Fig. 2.

10 The components as above listed in Fig. 1 with the exception of the circuitry of Fig. 2 are all known and available components.

In Fig. 2 the circuitry comprises the following known electronic components:

COMPONENT LIST

| | |
|----------|--|
| R15 | 10 ohm 1/4 w resistor |
| 15 R1 | 10 ohm 1/4 w resistor |
| R22 | 10 ohm 1/4 w resistor |
| R28 | 220 ohm 1/4 w resistor |
| R26 | 470 ohm 1/4 w resistor |
| R14,29,5 | 1K 1/4 w resistor |
| 20 R18 | 1.2K 1/4 w resistor |
| R23 | from 1K to 150K fixed component depending on unit, refer to data sheet |
| R11 | 4.7K 1/4 w resistor |
| R6 | 4.7K 1/4 w resistor |
| 25 R24 | 220K 1/4 w resistor |
| R10 | 68K 1/4 w resistor |
| R30 | 470K 1/4 w resistor |
| R27 | 470K 1/4 w resistor |
| R9 | 560K 1/4 w resistor |
| 30 R20 | 1M w resistor |
| R3 | 1.2M 1/4 w resistor |
| R21 | 1.5M 1/4 w resistor |
| R2 | 1.8M 1/4 w resistor |
| R17 | 5.6M 1/4 w resistor |
| 35 R4,12 | 110 ohm 1 w resistor |
| R25 | 0-25K depending on data sheet attached |
| R8 | 0-100K depending on data sheet attached |
| R19 | 0-50K depending on data sheet attached |
| R16 | 2.7K 1/4 w resistor |

- 5 -

| | | |
|----|----------|--|
| | R7N | Not part of main circuit board 3.3 ohms 5 watt |
| | R13N | Not part of main circuit board 3.3 ohms 5 watt |
| | C8 | TL .001 Ceramic 50V |
| | C2 | TL 470 Ceramic 50V |
| 5 | C3 | NL .001 G cap 100V |
| | C4 | TL .01 Ceramic 50V |
| | C5 | TM .1/50 Monobloc X5V low profile |
| | C1 | TM .1/50 Monobloc X5V low profile |
| | C6 | NL .01 G cap 100V |
| 10 | C7 | NL .01 G cap 100V |
| | D2 | IN 914A-P |
| | D1 | IN 914A-P |
| | IC1 | 555 chips |
| | IC2 | LM3900 chip |
| 15 | IC3 | 566 chip |
| | T1N | 2N3055 |
| | T7N | 2N3055 |
| | T6 | 2N2907A-M |
| | T9, 3, 2 | BSW64 |
| 20 | T4 | DS 557 |
| | T8, 2 | GED44C8. |

The present invention is a combination of two frequencies, an upper and a lower band frequency modulated together to produce an FM effect on transmission from a piece of peizo ceramic.

The lower band frequency, referred to as infrasonic frequency, is produced through a linear ramp in a 555 IC working as an astable operation which when triggered produces a pulse applied to an IC LM 3900 (op-amp) producing a staircase generation system which ramps down from a 12 volts. A zena diode D1 supplies the offset and prevents pin 5 of the 566 chip approaching the 12 volt locking up the ramp output of T5 producing a linear range of sweep voltage.

35 The IC3 produces a square wave output in the form

- 6 -

of an FM signal which is applied to T9 via pin 3 of IC3 in the required ultrasonic frequencies. The combination is then applied to a common output amp configuration of known circuitry type. The infrasonic signal is to be at the same pulse length as the bird's wing beat. Any alteration to that frequency will have little effect on controlling of birds.


It will be apparent to those skilled in the art that the combination of an infrasonic pulse frequency modulated with an ultrasonic pulse and used as a deterrent for crop pests is unique; and modifications both to the design of the transmitter and the circuitry may be made without departing from the scope of the present invention.

- 7 -


THE CLAIMS:

1. An electronic frequency modulator which combines a lower band frequency with an upper band frequency to produce a square wave output on transmission from a transducer.
2. An electronic frequency modulator as claimed in claim 1 wherein the transducer is in the form of a peizo ceramic.
3. An electronic frequency modulator as claimed in claims 1 or 2 wherein the lower band frequency is pulsed with an upper band frequency pulse.
4. A method of protecting crops from crop pests using an electronic frequency modulator which combines a lower band frequency with an upper band frequency to produce a square wave output on transmission from a transducer.
5. A method of protecting crops from crop pests as claimed in claim 4 wherein the transducer is a peizo ceramic.
6. A method as claimed in claims 4 or 5 wherein the square wave output is of a frequency corresponding to the frequency of the particular crop pests wing beat.
7. A method as claimed in claims 4 or 5 wherein the square wave output is of a frequency corresponding to the frequency of the particular crop pests heart beat.
8. An electronic frequency modulator as herein described with reference to the attached drawings.
9. A method of protecting crops from crop pests as herein described.
10. An electronic frequency modulator as claimed in claim 1 to 3 which combines a lower band frequency in the range of 1-500 cps with an upper band frequency in the range of 10-80 KHz.
11. A method of projecting crops from crop pests as claimed in claim 4 to 7 which combines a lower band frequency in the range of 1-500 cps with an upper band frequency in the range of 10-80 KHz.

17/2

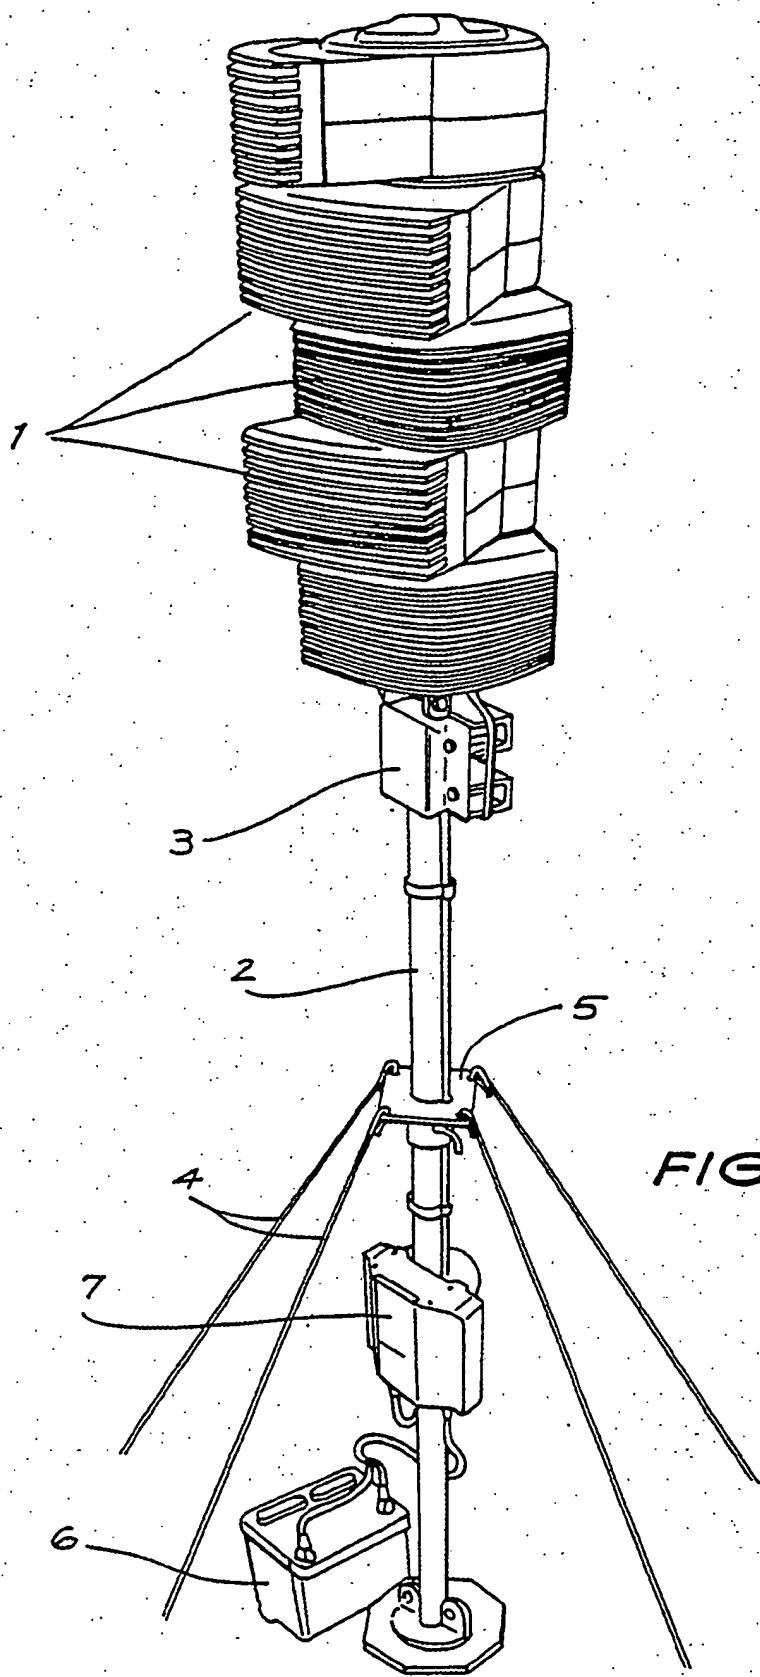

2/2

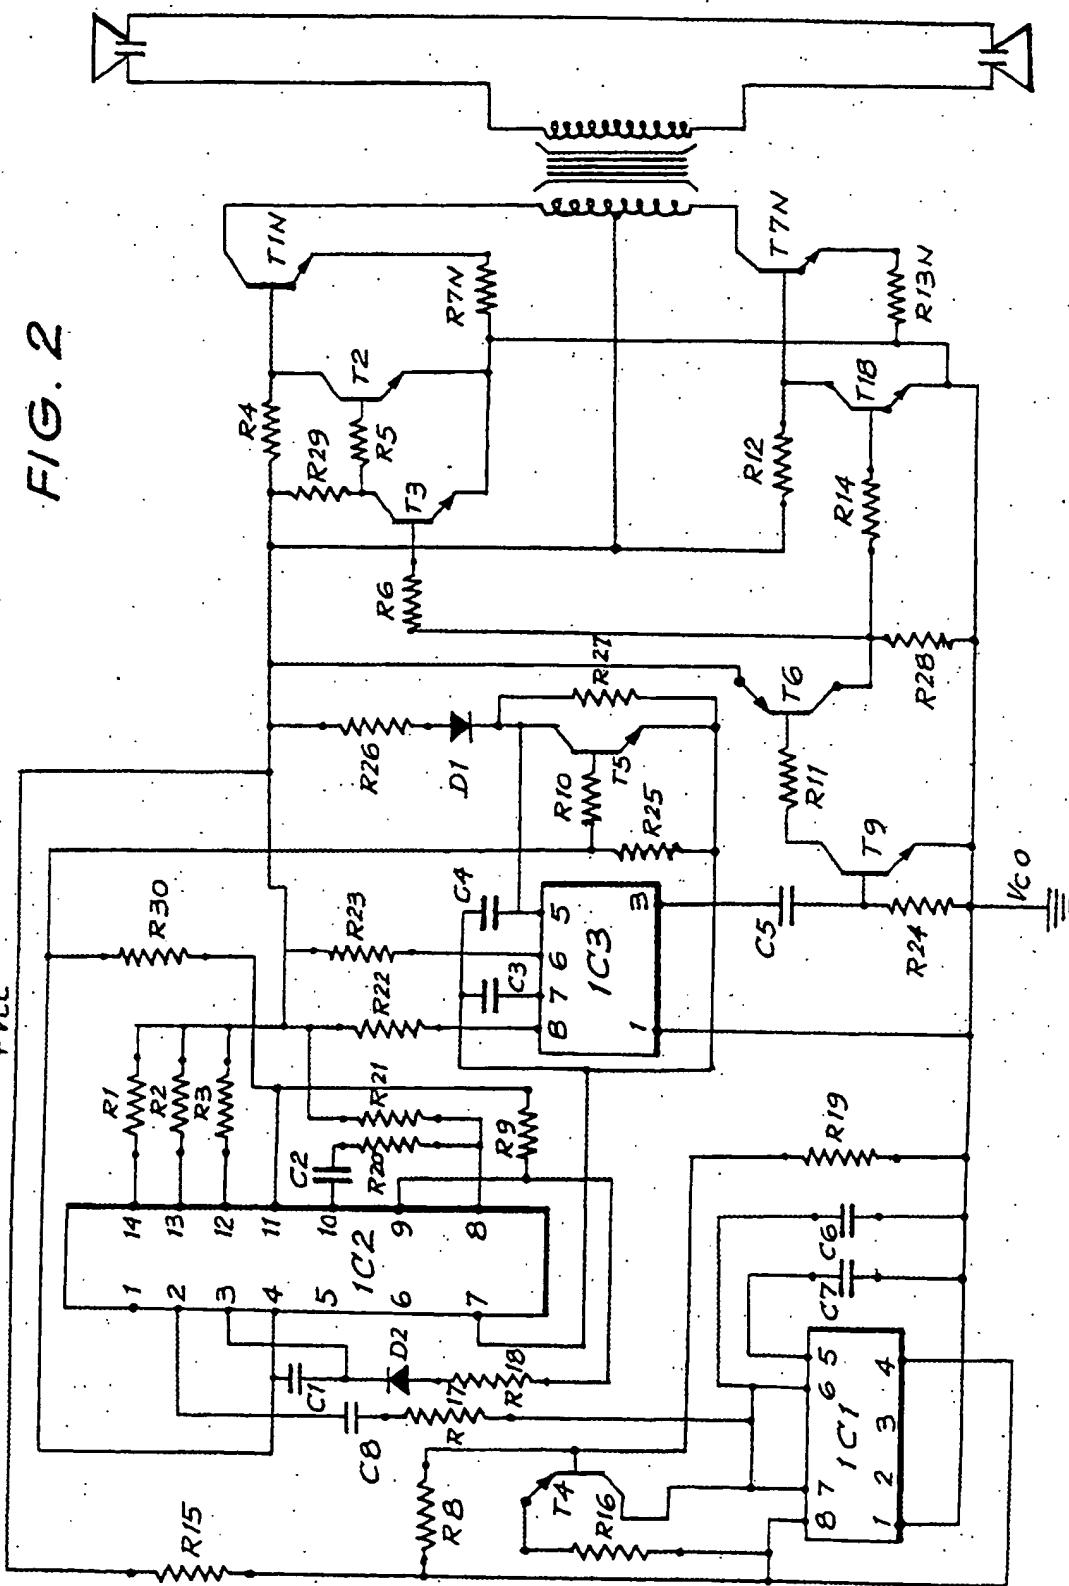

INTERNATIONAL SEARCH REPORT

International Application No PCT/AU 85/00258

I. CLASSIFICATION OF SUBJECT MATTER (If not in Class 1, 2 or 3, state which class is relevant)

According to International Patent Classification (IPC) or to both National Classification and IPC

Int. Cl. 4 A01M 29/02, H03K 7/06

II. FIELDS SEARCHED

Minimum Documentation Searched *

Classification System

Classification Symbols

IPC

A01M 29/02, H03K 7/00, 7/06

Documentation Searched other than Minimum Documentation
to the Extent that such Documents are Included in the Fields Searched *

AU : IPC as above, Australian Classification 05.52

III. DOCUMENTS CONSIDERED TO BE RELEVANT*

| Category * 1 | Citation of Document, * 2 with indication, where appropriate, of the relevant passages * 3 | Relevant to Claim No * 4 |
|--------------|--|--------------------------|
| X,Y | AU,B, 62394/80 (536442) (CARSON) 2 April 1981 (02.04.81) | (1-5,8-11) |
| P | AU,A, 35990/84 (ESPAÑOLA PTY LTD) 13 June 1985 (13.06.85) | (1-5,8-11) |
| X,Y | GB,A, 1265441 (SONICTRON CORPORATION) 1 March 1972 (01.03.72) | (1-5,8-11) |
| P | EP,A2, 0129415 (TOKYO ELITE CO., LTD) 27 December 1984 (27.12.84) | (1-5,8-11) |
| X,Y | US,A, 4186387 (MOSCHGAT) 29 January 1980 (29.01.80) | (1-5,8-11) |
| X,Y | US,A, 3872472 (MOSCHGAT) 18 March 1975 (18.03.75) | (1-5,8-11) |
| X,Y | FR,A, 2479652 (RELLE) 9 October 1981 (09.10.81) | (1-5,8-11) |
| X,Y | US,A, 3300733 (PRICE) 24 January 1967 (24.01.67) | (1-5,8-11) |
| X,Y | US,A, 2856586 (NEWSOM et al) 14 October 1958 (14.10.58) See Column 2 | (1-5,8-11) |
| X,Y | GB,A, 642097 (SADIR-CARPENTER) 30 August 1950 (30.08.50) | (1-5,8-11) |

* Special categories of cited documents. * 0

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"A" document member of the same patent family

IV. CERTIFICATION

Date of the Actual Completion of the International Search

9 January 1986 (09.01.86)

Date of Mailing of this International Search Report

(7-01-86)

17 JANUARY 1986

International Searching Authority

Australian Patent Office

Designated Authorized Officer

R. TOLHURST

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON
INTERNATIONAL APPLICATION NO. PCT/AU 85/00258

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document
Cited in Search
Report

Patent Family Members

EP 129415 JP 60002134

| | | | |
|------------|------------|-------------|------------|
| US 4186387 | AR 218044 | AU 30092/77 | BE 860422 |
| | BR 7707384 | DE 2748637 | FR 2369795 |
| | GB 1555435 | JP 53086376 | NL 7711886 |

END OF ANNEX

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- BLACK BORDERS**
- IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- FADED TEXT OR DRAWING**
- BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- SKEWED/SLANTED IMAGES**
- COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- GRAY SCALE DOCUMENTS**
- LINES OR MARKS ON ORIGINAL DOCUMENT**
- REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.